
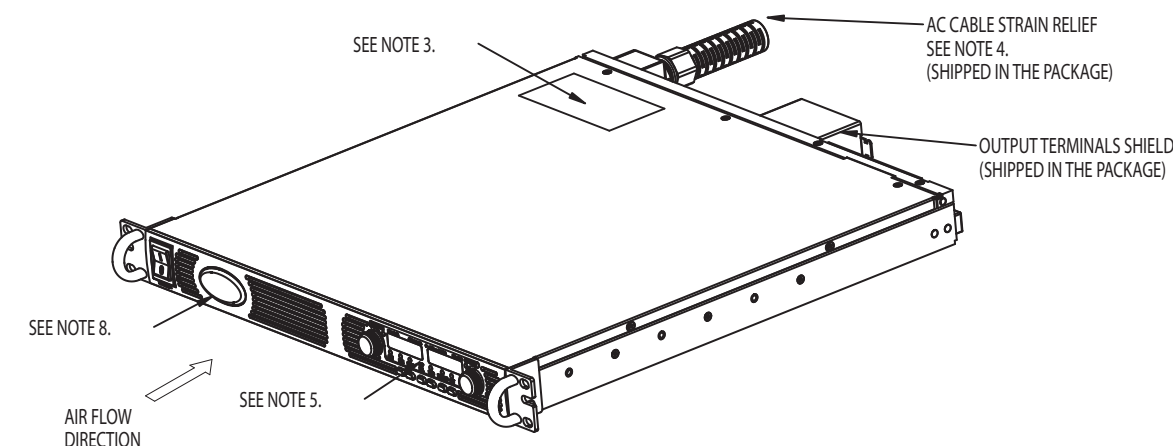
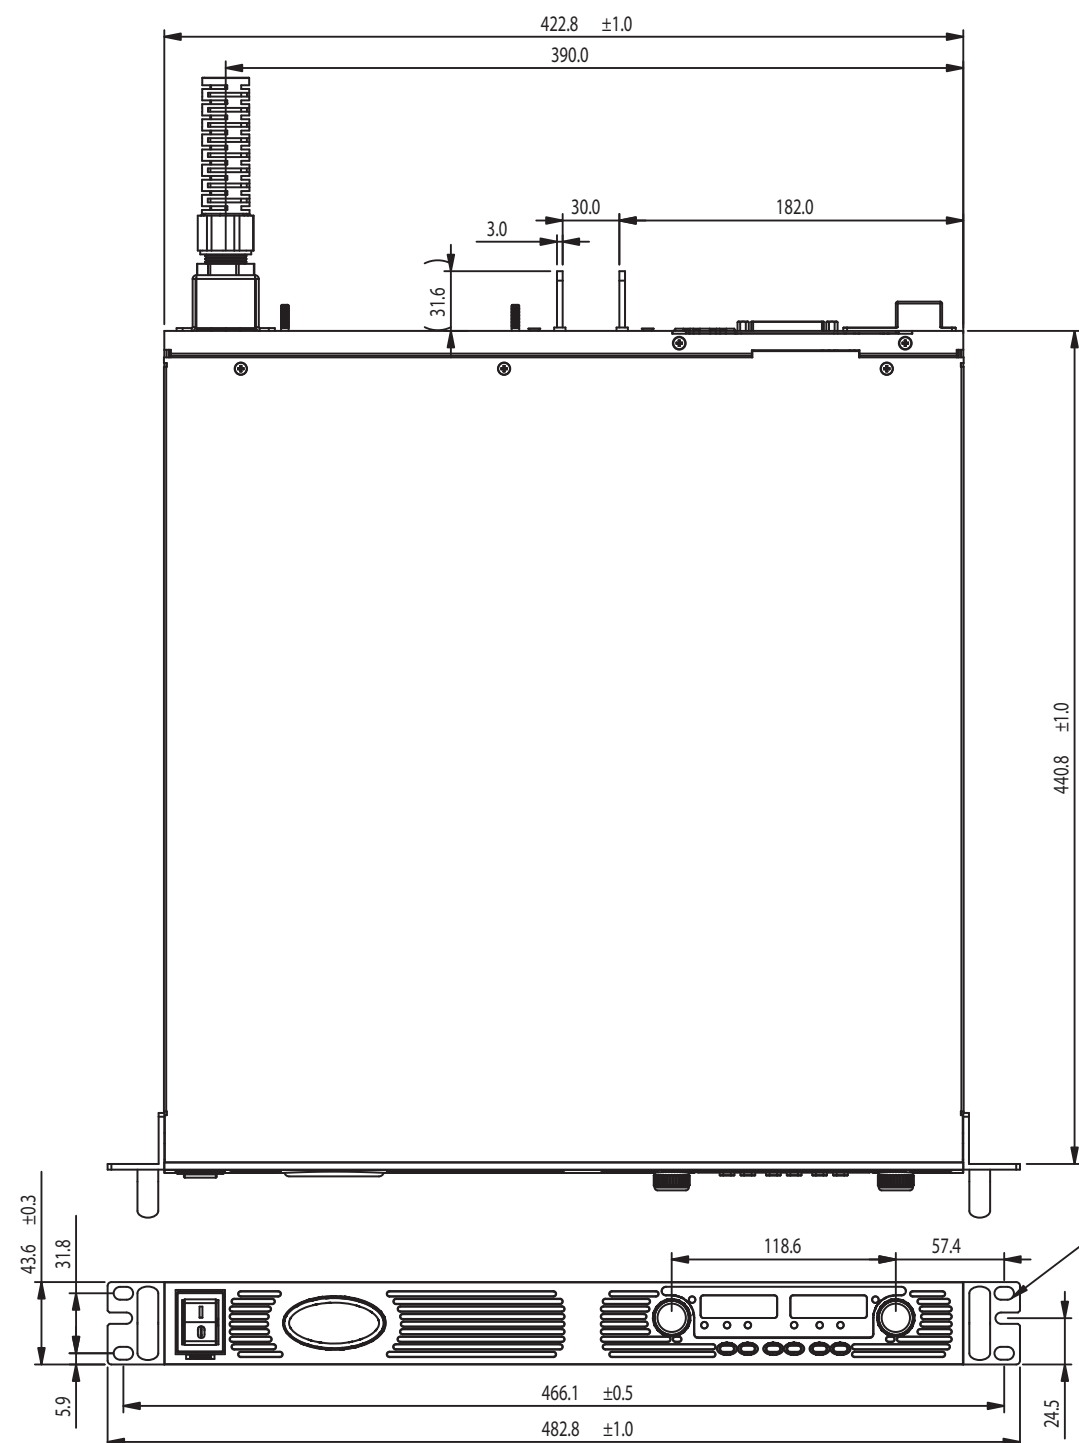
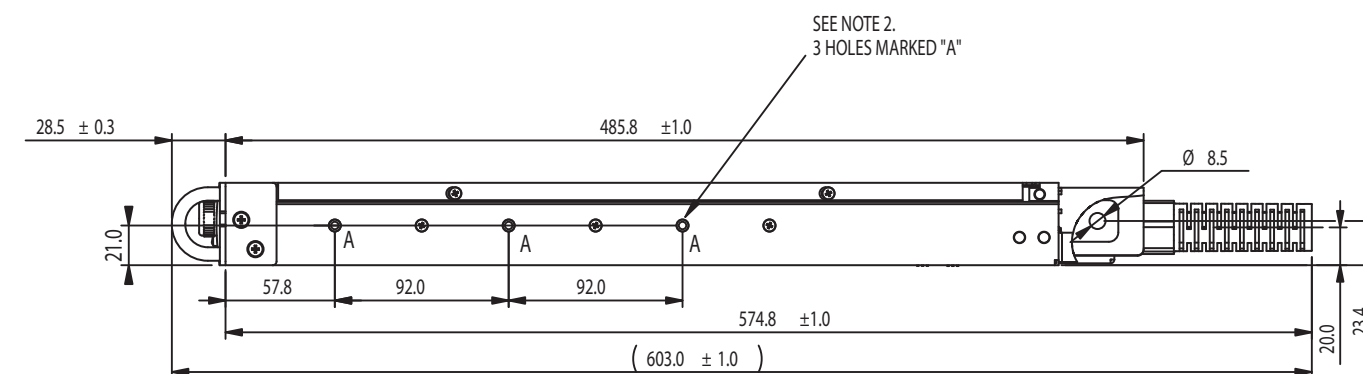


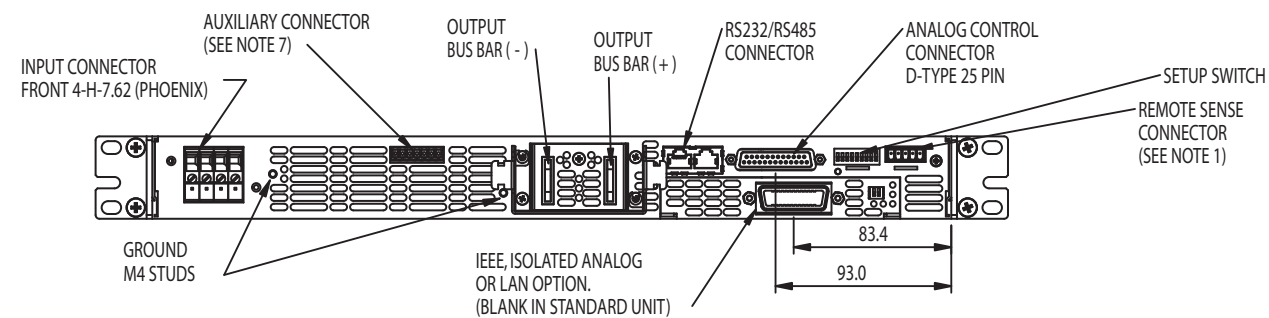

- NOTE
1. MATING PLUG P/N MC1.5/5-ST-3.81 PHOENIX.
 2. MOUNTING HOLES FOR SLIDE P/N CC3001-00-S160 GENERAL DEVICES OR EQUIVALENT. USE 3x#10-32x038 inch SCREWS FOR EACH SLIDE. ENSURE THAT THE SCREWS DO NOT PENETRATE MORE THAN 6.0 mm INTO THE UNIT.
 3. AC INPUT RATING AND SAFETY APPROVAL SYMBOLS ARE SHOWN HERE IN ACCORDING TO THE SPECIFICATION.
 4. STRAIN RELIEF DEVICE P/N: 1576.16.11 AGRO.
 5. MODEL NAME AND OUTPUT RATING ARE SHOWN HERE ACCORDING TO THE SPECIFICATION.
 6. MOUNTING HOLES FOR 19" RACK, USE M6x16 SCREWS TO FIX THE UNIT TO THE RACK.
 7. MATING PLUG P/N IMC1.5/7-ST-3.81 PHOENIX.
 8. COMPANY LOGO IS SHOWN HERE.

MODEL
PAG8-300
PAG10-240
PAG16-150
PAG20-120
PAG30-80
PAG40-60
PAG60-40
PAG80-30
PAG100-24

5							
4							
3							
2							
1	11.01.18	清水	清水	清水	1 : 4	MTRL	
	DATE	APVL	DSGN	DRWG	SCLE	FNSH	
TITLE						TLGE	
OUTLINE DRAWING PAG 1U 2.4kW LV						PART CODE	DRAWING NO
							MC05916