
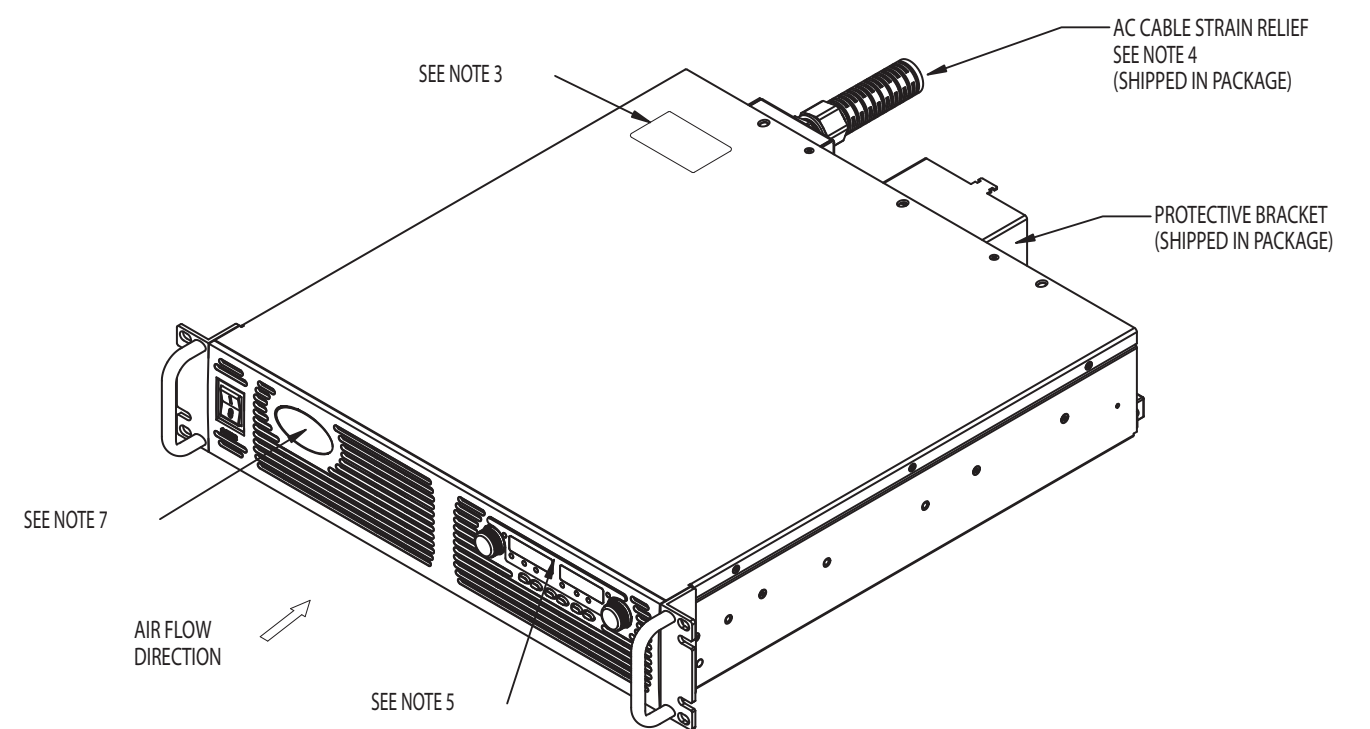
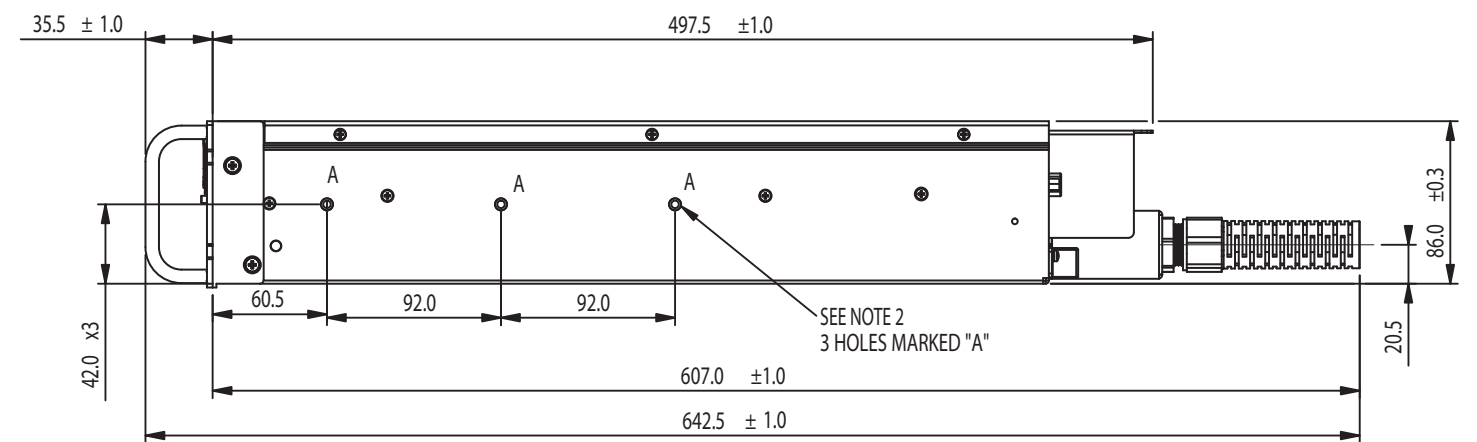


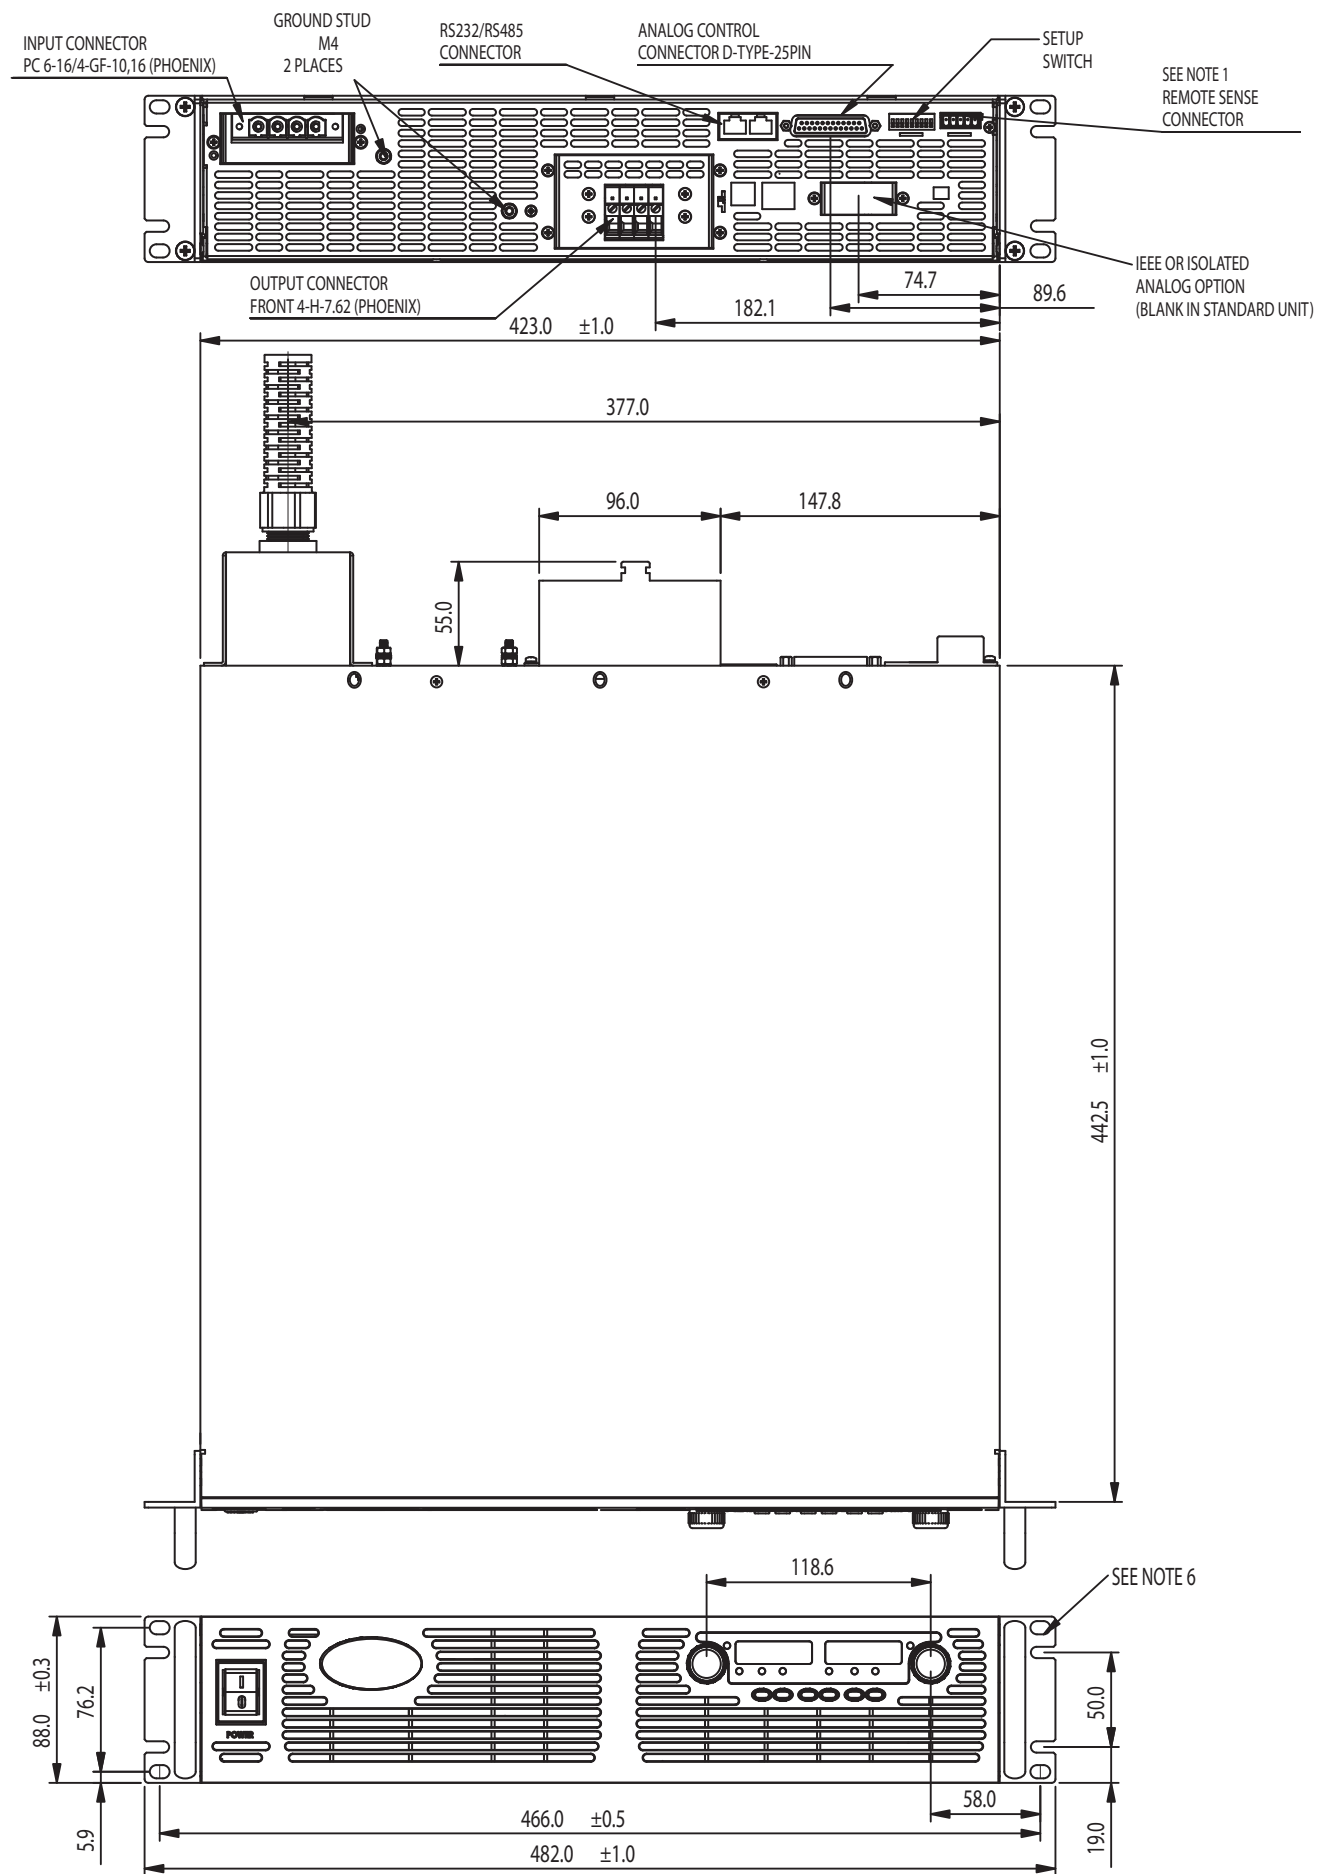

- NOTE
1. MATING PLUG P/N: MC1.5/5-G-3.81 PHOENIX
 2. MOUNTING HOLES FOR SLIDES P/N: CC3001-00-S160, GENERAL DEVICES OR EQUIVALENT. USE #10-32x0.38 INCH x3 SCREWS FOR EACH SLIDE.
ENSURE THAT THE SCREWS DO NOT PENETRATE MORE THAN 6.0mm INTO THE UNIT.
 3. AC INPUT RATING AND SAFETY APPROVAL SYMBOLS ARE SHOWN HERE ACCORDING TO THE SPECIFICATIONS.
 4. STRAIN RELIEF DEVICE P/N: 1576.16.11 AGRO.
 5. MODEL NAME AND OUTPUT RATING ARE SHOWN HERE ACCORDING TO THE SPECIFICATIONS.
 6. MOUNTING HOLES FOR 19" RACK, USE M6x16 SCREWS TO FIX THE UNIT TO THE RACK.
 7. COMPANY LOGO IS SHOWN HERE.

MODEL
PAG150-22
PAG300-11
PAG600-5.5

5							
4							
3							
2							
1	11.10.18	清水	清水	清水	1 : 4	MTRL	
	DATE	APVL	DSGN	DRWG	SCLE	FNSH	
TITLE						TLGE	
OUTLINE DRAWING PAG 2U 3kW 3P HV						PART CODE	DRAWING NO
							MC06104